

WIPER SEALS BECA 486



DESCRIPTION

The BECA 486 profile is a double acting composite wiper seal composed of a filled PTFE friction ring and two pre-tightened rubber O'Rings.

ADVANTAGES

Low friction coefficient;
no stick-slip effect

Wide temperature range and excellent chemical resistance, depending on the materials selected

Excellent abrasion and wear resistance

Very good wiping effect against external pollutions

Suitable for large dimensions

APPLICATIONS

Steelworks

Offshore

Mine

Hydraulic presses

Water treatment

MATERIALS

Friction ring

Bronze-filled PTFE

Carbon-filled PTFE

O'Rings

NBR 70 Shore A

FKM 70 Shore A

Other grades of materials are available. Please refer to the materials table on the next page.

TECHNICAL DATA

Temperature	-30°C / +200°C
Speed	5 m/s
Media	Mineral hydraulic oils Fire-resistant liquids Biocompatible fluids Water Others (contact our experts)

The figures above indicate the maximum values and may not be cumulated. They may be developed, depending on the materials used.

SURFACE ROUGHNESS

Roughness	Dynamic surface area	Static surface area	Groove flanks
Ra	0.05 - 0.2 µm	≤1.6 µm	≤3.2 µm
Rz	0.4 - 1.6 µm	≤6.3 µm	≤10.0 µm
Rmax	0.63 - 2.5 µm	≤10.0 µm	≤16.0 µm

RADIUS

Radial section S	Radius R1	Radius R2
11.10	0.30	1.20
12.10	0.30	1.20
16.50	0.30	1.20
18.25	0.30	2.00

CHAMFER

The chamfer length as well as the chamfer angle are determined by the rod seal.

DETERMINATION OF O'RING INSIDE DIAMETERS


Radial section S	Ød1 O'Rings	
	Ød1.1	Ød1.2
11.10	Ød1 + 12.00	Ød1 + 5.00
12.10	Ød1 + 14.00	Ød1 + 5.00
16.50	Ød1 + 20.00	Ød1 + 6.00
18.25	Ød1 + 21.00	Ød1 + 6.00

We recommend consulting the dimensions in standard ISO 3601-1 that are closest to the value calculated.

○ TABLE MATERIALS

Friction ring					O'Rings			Mating surface material	
Standard code	ISO code	Material	Colour	Characteristics	Code	Type of material	Service temperature		
DP	P	Virgin PTFE	White	Resistance to chemical products Impermeability Dielectric Non-stick Low friction coefficient Food industry	K6	NBR 70 Shore A	-30°C/+100°C	Steel Stainless steel Chrome steel Aluminium Bronze Cast iron Treated surface	
					G6	FKM 70 Shore A	-20°C/+200°C		
					C6	EPDM 70 Shore A	-45°C/+150°C		
					F6	VMQ 70 Shore A	-60°C/+200°C		
DC	C	PTFE + 25% Carbon	Grey	Improvements • Wear properties • Compression set Good resistance to chemical products Thermal and electrical conductivity Anti-static High-performing in compression-based dynamic applications	K6	NBR 70 Shore A	-30°C/+100°C		
					G6	FKM 70 Shore A	-20°C/+200°C		
					C6	EPDM 70 Shore A	-45°C/+150°C		
CG	C	PTFE + 23% Carbon + 2% Graphite	Black	Thermal and electrical conductivity Anti-static High-performing in compression-based dynamic applications	K6	NBR 70 Shore A	-30°C/+100°C		
					G6	FKM 70 Shore A	-20°C/+200°C		
					C6	EPDM 70 Shore A	-45°C/+150°C		
DV	V	PTFE + 25 % Glass	Blue	Improvements • Wear properties • Mechanical strength Slightly more abrasive, however, this is corrected by adding MOS2 Maintains its chemical and dielectric properties Well-suited to applications with rotational and simultaneous alternating movements	K6	NBR 70 Shore A	-30°C/+100°C		Steel Chrome steel Cast iron
					G6	FKM 70 Shore A	-20°C/+200°C		
VM	M	PTFE + 15 % Glass + 5% MOS2	Grey	Well-suited to applications with rotational and simultaneous alternating movements	K6	NBR 70 Shore A	-30°C/+100°C		
					G6	FKM 70 Shore A	-20°C/+200°C		
DX	X	PTFE GL Blue + Glass + Metal oxides	Turquoise blue	Resistance to compression Resistance to wear Excellent chemical stability Good thermal conductivity	K6	NBR 70 Shore A	-30°C/+100°C		
					G6	FKM 70 Shore A	-20°C/+200°C		
DG	G	PTFE + 15% Graphite	Black	Improvements • Wear properties Reduced wear on metal parts Self-lubricating Thermal and electrical conductivity Low permeability Good friction coefficient Anti-static High performing in dynamic self-lubricating applications	K6	NBR 70 Shore A	-30°C/+100°C	Steel Stainless steel Chrome steel Aluminium Bronze Cast iron Treated surface	
					G6	FKM 70 Shore A	-20°C/+200°C		
					C6	EPDM 70 Shore A	-45°C/+150°C		
K1	K	PTFE + 10% Ekonol	Light brown	Improvements • Better abrasion resistance • Better dimensional stability at high temperatures Use up to +300°C Good friction coefficient and low permeability	K6	NBR 70 Shore A	-30°C/+100°C		
					G6	FKM 70 Shore A	-20°C/+200°C		
					C6	EPDM 70 Shore A	-45°C/+150°C		
K2	K	PTFE + 20% Ekonol	Light brown	Use up to +300°C Good friction coefficient and low permeability	K6	NBR 70 Shore A	-30°C/+100°C		
					G6	FKM 70 Shore A	-20°C/+200°C		
					C6	EPDM 70 Shore A	-45°C/+150°C		
DB	B	PTFE + 60% Bronze	Dark brown	Improvements • Wear properties • Warping resistance and creep strength • Compression resistance Self-lubricating Electrical and thermal conductivity Does not alter the metal parts Reduced hold with certain chemical products Used for high-compression dynamic seals and has a low level of wear	K6	NBR 70 Shore A	-30°C/+100°C	Steel Chrome steel Cast iron	
					G6	FKM 70 Shore A	-20°C/+200°C		
B4	B	PTFE + 40% Bronze	Dark brown	Used for high-compression dynamic seals and has a low level of wear	K6	NBR 70 Shore A	-30°C/+100°C		
					G6	FKM 70 Shore A	-20°C/+200°C		

Other grades of materials are available depending on your specificities.

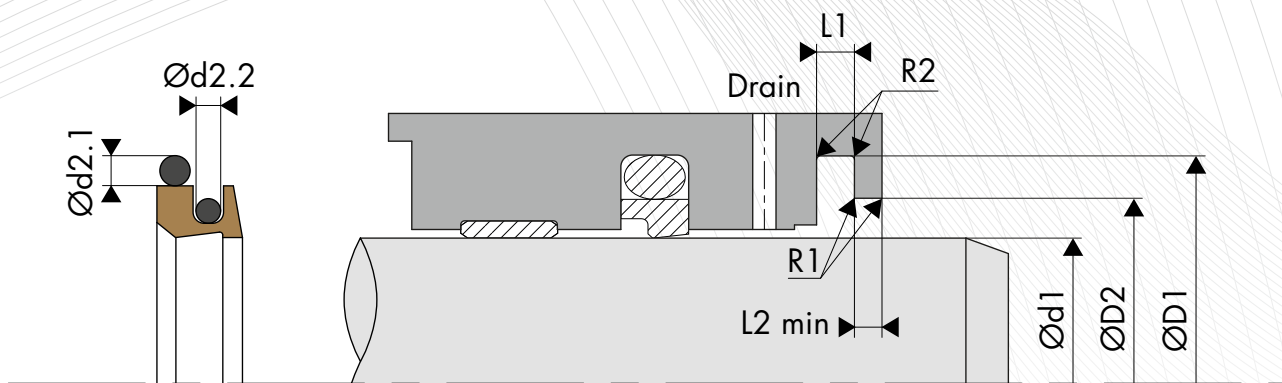


○ INSTALLATION DIMENSIONS

Rod diameter Ød1 f8/h9		Groove diameter	Bore diameter	Groove width	Step width	O'Ring cross-section	O'Ring cross-section
Standard range	Extended range	ØD1 H8	ØD2 H8	L1 0/+0.20	L2 +0/-0.10	Ød2.1	Ød2.2
140.0 - 229.9	100.0 - 450.0	d1 + 22.20	d1 + 10.70	6.30	4.20	5.33	3.53
230.0 - 299.9	220.0 - 450.0	d1 + 24.20	d1 + 10.70	6.30	4.20	5.33	3.53
300.0 - 629.9	250.0 - 650.0	d1 + 33.00	d1 + 15.10	8.10	6.30	6.99	5.33
630.0 - 999.9	550.0 - 999.9	d1 + 36.50	d1 + 15.10	9.50	6.30	8.40	5.33

○ EXAMPLE OF CODIFICATION

STANDARD CODIFICATION

Materials _____ : Friction ring, PTFE + 60% Bronze - Code DB
 _____ : NBR 70 Shore A O'Rings - Code K6
Rod diameter _____ : Ød1 = 150.00 mm
Groove diameter _____ : ØD1 = 172.20 mm
Part number _____ : 486.150DBK6

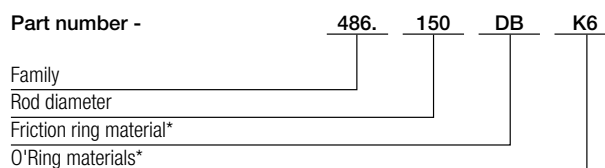

* The codes that define the materials are set out in the materials table on the previous page.

DIMENSIONS

Part number	Rod diameter Ød1 f8/h9	Groove diameter ØD1 H8	Bore diameter ØD2 H8	Seal height H1	Groove width L1 0/+0.20	Step width L2 +0/-0.10	O'Ring Ød1.1 x Ød2.1	O'Ring Ød1.2 x Ød2.2
486.100	100.00	122.20	110.70	13.50	6.30	4.20	110.49 x 5.33	104.37 x 3.53
486.110	110.00	132.20	120.70	13.50	6.30	4.20	123.19 x 5.33	117.07 x 3.53
486.120	120.00	142.20	130.70	13.50	6.30	4.20	132.72 x 5.33	126.59 x 3.53
486.130	130.00	152.20	140.70	13.50	6.30	4.20	142.24 x 5.33	136.12 x 3.53
486.140	140.00	162.20	150.70	13.50	6.30	4.20	151.77 x 5.33	142.47 x 3.53
486.150	150.00	172.20	160.70	13.50	6.30	4.20	164.47 x 5.33	151.99 x 3.53
486.160	160.00	182.20	170.70	13.50	6.30	4.20	170.82 x 5.33	164.69 x 3.53
486.170	170.00	192.20	180.70	13.50	6.30	4.20	183.52 x 5.33	171.04 x 3.53
486.180	180.00	202.20	190.70	13.50	6.30	4.20	189.87 x 5.33	183.74 x 3.53
486.190	190.00	212.20	200.70	13.50	6.30	4.20	202.57 x 5.33	190.09 x 3.53
486.200	200.00	222.20	210.70	13.50	6.30	4.20	215.27 x 5.33	202.79 x 3.53
486.210	210.00	232.20	220.70	13.50	6.30	4.20	221.62 x 5.33	215.49 x 3.53
486.220	220.00	242.20	230.70	13.50	6.30	4.20	234.32 x 5.33	221.84 x 3.53
486.230	230.00	254.20	240.70	13.50	6.30	4.20	247.02 x 5.33	234.54 x 3.53
486.240	240.00	264.20	250.70	13.50	6.30	4.20	253.37 x 5.33	247.24 x 3.53
486.250	250.00	274.20	260.70	13.50	6.30	4.20	266.07 x 5.33	253.59 x 3.53
486.260	260.00	284.20	270.70	13.50	6.30	4.20	278.77 x 5.33	266.29 x 3.53
486.270	270.00	294.20	280.70	13.50	6.30	4.20	278.77 x 5.33	278.99 x 3.53
486.280	280.00	304.20	290.70	13.50	6.30	4.20	291.47 x 5.33	291.69 x 3.53
486.290	290.00	314.20	300.70	13.50	6.30	4.20	304.17 x 5.33	291.69 x 3.53
486.300	300.00	333.00	315.10	18.40	8.10	6.30	316.87 x 6.99	304.17 x 5.33
486.310	310.00	343.00	325.10	18.40	8.10	6.30	329.57 x 6.99	304.17 x 5.33
486.320	320.00	353.00	335.10	18.40	8.10	6.30	342.47 x 6.99	329.57 x 5.33
486.330	330.00	363.00	345.10	18.40	8.10	6.30	354.97 x 6.99	329.57 x 5.33
486.340	340.00	373.00	355.10	18.40	8.10	6.30	354.97 x 6.99	354.97 x 5.33
486.350	350.00	383.00	365.10	18.40	8.10	6.30	367.67 x 6.99	354.97 x 5.33
486.360	360.00	393.00	375.10	18.40	8.10	6.30	380.37 x 6.99	354.97 x 5.33
486.370	370.00	403.00	385.10	18.40	8.10	6.30	393.07 x 6.99	380.37 x 5.33
486.380	380.00	413.00	395.10	18.40	8.10	6.30	405.26 x 6.99	380.37 x 5.33
486.390	390.00	423.00	405.10	18.40	8.10	6.30	417.96 x 6.99	405.26 x 5.33
486.400	400.00	433.00	415.10	18.40	8.10	6.30	417.96 x 6.99	405.26 x 5.33
486.410	410.00	443.00	425.10	18.40	8.10	6.30	430.66 x 6.99	405.26 x 5.33
486.420	420.00	453.00	435.10	18.40	8.10	6.30	443.36 x 6.99	430.66 x 5.33
486.430	430.00	463.00	445.10	18.40	8.10	6.30	456.06 x 6.99	430.66 x 5.33
486.440	440.00	473.00	455.10	18.40	8.10	6.30	468.76 x 6.99	456.06 x 5.33
486.450	450.00	483.00	465.10	18.40	8.10	6.30	468.76 x 6.99	456.06 x 5.33
486.460	460.00	493.00	475.10	18.40	8.10	6.30	481.46 x 6.99	456.06 x 5.33
486.470	470.00	503.00	485.10	18.40	8.10	6.30	494.16 x 6.99	481.38 x 5.33
486.480	480.00	513.00	495.10	18.40	8.10	6.30	506.86 x 6.99	481.38 x 5.33
486.500	500.00	533.00	515.10	18.40	8.10	6.30	532.26 x 6.99	506.78 x 5.33

The figures highlighted in bold correspond to the rod diameters in line with standard ISO 3320. Other intermediate sizes can be provided.