

SHAFT SEALS WITH PTFE LIPS BECA 806



DESCRIPTION

The BECA 806 profile is a shaft seal composed of a primary lip with filled PTFE pumping leads; one section can be made of felt, preventing depression in the area, and a coating with rubber grooves.

ADVANTAGES

Excellent chemical inertia
Very good friction coefficient;
no stick-slip effect
Optimised static sealing

APPLICATIONS

Engines
Crankshafts

MATERIALS

Rubber

ACM 70 - 75 Shore A
FKM 70 - 75 Shore A
HNBR 70 - 75 Shore A
NBR 70 - 75 Shore A

Sealing lip

Virgin PTFE
Glass-filled PTFE
Carbon-filled PTFE

Metal cage

Steel - AISI 1010
Stainless steel - AISI 304
Stainless steel - AISI 316

SEAL DESIGN

Tolerance for the outside diameter of the seal (ØD)


Bore diameter ØD1 (mm)	Apparent metal cage	Rubber coating	Coating with grooves
ØD1 ≤ 50.0	+0.10 / +0.20	+0.15 / +0.30	+0.20 / +0.40
50.0 < ØD1 ≤ 80.0	+0.13 / +0.23	+0.20 / +0.35	+0.25 / +0.45
80.0 < ØD1 ≤ 120.0	+0.15 / +0.25	+0.20 / +0.35	+0.25 / +0.45
120.0 < ØD1 ≤ 180.0	+0.18 / +0.28	+0.25 / +0.45	+0.30 / +0.55
180.0 < ØD1 ≤ 300.0	+0.20 / +0.30	+0.25 / +0.45	+0.30 / +0.55
300.0 < ØD1 ≤ 500.0	+0.23 / +0.35	+0.30 / +0.55	+0.35 / +0.65
500.0 < ØD1 ≤ 630.0	+0.23 / +0.35	+0.35 / +0.65	+0.40 / +0.75

Roundness tolerance

Bore diameter ØD1 (mm)	Apparent metal cage	Rubber coating
ØD1 ≤ 50.0	0.18	0.25
50.0 < ØD1 ≤ 80.0	0.25	0.35
80.0 < ØD1 ≤ 120.0	0.30	0.50
120.0 < ØD1 ≤ 180.0	0.40	0.65
180.0 < ØD1 ≤ 300.0	0.25% of the outside diameter	0.80
300.0 < ØD1 ≤ 500.0	0.25% of the outside diameter	1.00
500.0 < ØD1 ≤ 630.0	-	-

TECHNICAL DATA

Speed

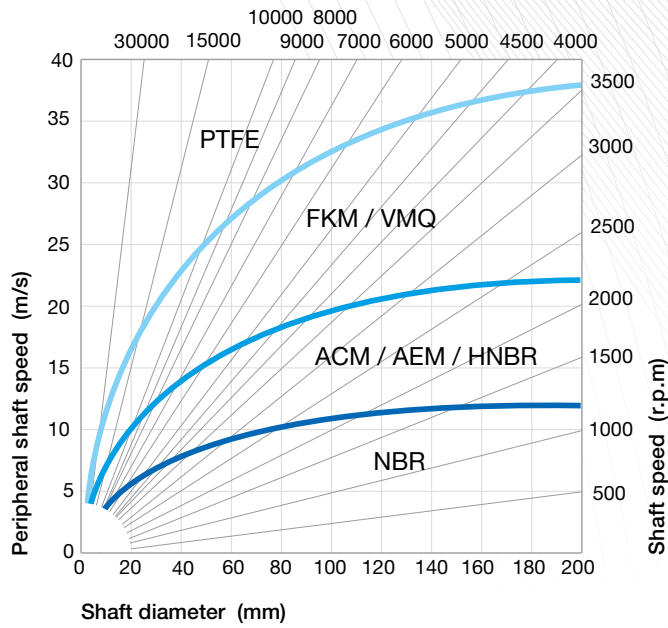


Linear speed calculation:

$$s \text{ (m/s)} = \frac{[\text{shaft } \varnothing \text{ (mm)} \times \text{speed (rpm)} \times \pi]}{60,000}$$

Temperature / Media

Media		Maximum temperature depending on the materials
		PTFE
Mineral oils	Oils for motors	+150°C
	Oils for gearboxes	+150°C
	Oils for hypoid gears	+150°C
	ATF oils	+150°C
	Hydraulic oils	+150°C
	Greases	+150°C
Fire-resistant fluids	HFA group - Emulsion with more than 80% water	+
	HFB group - Opposite solution (water in oil)	+
	HFC group - Polymer aqueous solution	+
	HFD group - Water-free synthetic fluids	+150°C
Other fluids	EL + L heating oil	+
	Air	+150°C
	Water	+
	Water for washing	+
Temperature range	Min.	-60°C
	Max.	+200°C

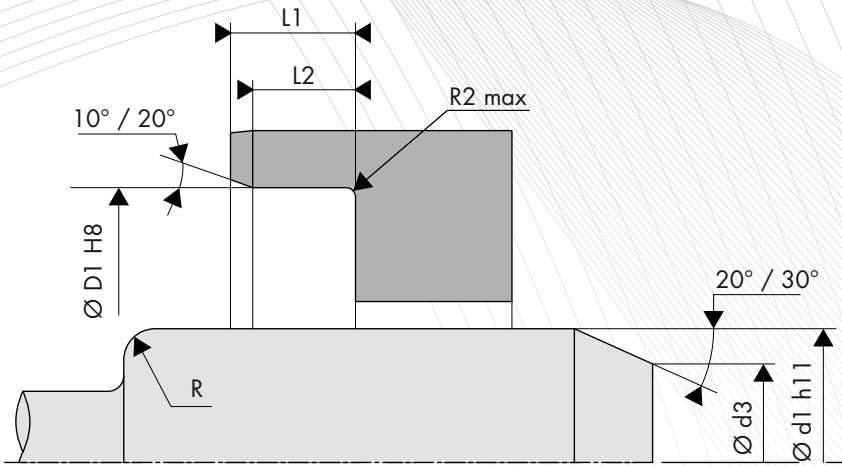

SHAFT DESIGN

Shaft hardness

Rotation speed	Hardness in HRC
$s \leq 4.0$ m/sec	45 HRC
$4.0 < s \leq 10.0$ m/s	55 HRC
$s > 10.0$ m/sec	60 HRC

Surface roughness

Ra	0.1 to 0.4 μm
Rz	1.0 to 4.0 μm
Rmax	≤ 6.3 μm


Shaft tolerance

Shaft diameter $\varnothing d1$ (mm)	Tolerance h11 (mm)
$\varnothing d1 \leq 3.0$	-0.060 / 0
$3.0 < \varnothing d1 \leq 6.0$	-0.075 / 0
$6.0 < \varnothing d1 \leq 10.0$	-0.090 / 0
$10.0 < \varnothing d1 \leq 18.0$	-0.110 / 0
$18.0 < \varnothing d1 \leq 30.0$	-0.130 / 0
$30.0 < \varnothing d1 \leq 50.0$	-0.160 / 0
$50.0 < \varnothing d1 \leq 80.0$	-0.190 / 0
$80.0 < \varnothing d1 \leq 120.0$	-0.220 / 0
$120.0 < \varnothing d1 \leq 180.0$	-0.250 / 0
$180.0 < \varnothing d1 \leq 250.0$	-0.290 / 0
$250.0 < \varnothing d1 \leq 315.0$	-0.320 / 0
$315.0 < \varnothing d1 \leq 400.0$	-0.360 / 0
$400.0 < \varnothing d1 \leq 500.0$	-0.400 / 0


Chamfer and radius


Shaft diameter $\varnothing d1$ (mm)	Chamfer diameter $\varnothing d3$ (mm)	Radius R (mm)
$\varnothing d1 \leq 10.0$	$\varnothing d1 - 1.50$	2.00
$10.0 < \varnothing d1 \leq 20.0$	$\varnothing d1 - 2.00$	2.00
$20.0 < \varnothing d1 \leq 30.0$	$\varnothing d1 - 2.50$	3.00
$30.0 < \varnothing d1 \leq 40.0$	$\varnothing d1 - 3.00$	3.00
$40.0 < \varnothing d1 \leq 50.0$	$\varnothing d1 - 3.50$	4.00
$50.0 < \varnothing d1 \leq 70.0$	$\varnothing d1 - 4.00$	4.00
$70.0 < \varnothing d1 \leq 95.0$	$\varnothing d1 - 4.50$	5.00
$95.0 < \varnothing d1 \leq 130.0$	$\varnothing d1 - 5.50$	6.00
$130.0 < \varnothing d1 \leq 240.0$	$\varnothing d1 - 7.00$	8.00
$240.0 < \varnothing d1 \leq 500.0$	$\varnothing d1 - 11.00$	12.00

Shaft run out

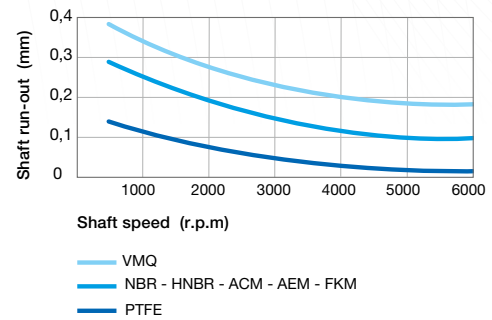

Eccentricity

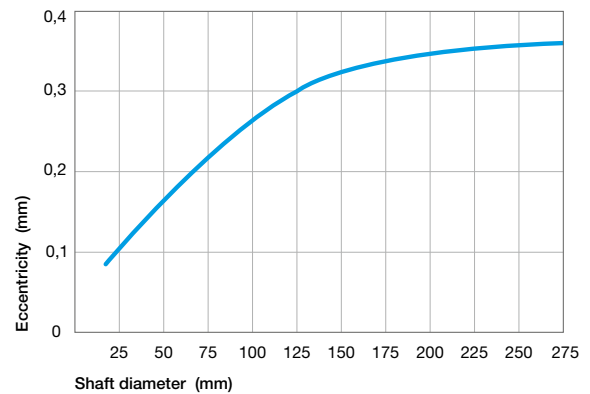

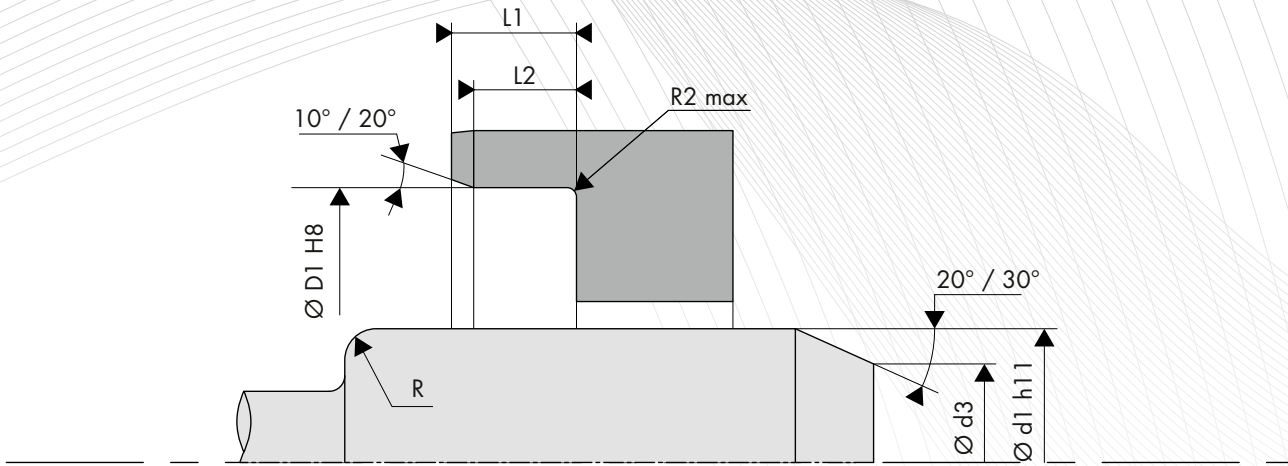

HOUSING DESIGN

Surface roughness

Ra	1.6 to 6.3 μm
Rz	10.0 to 25.0 μm
Rmax	$\leq 25.0 \mu\text{m}$

Housing tolerance

Bore diameter ØD1 (mm)	Tolerance H8 (mm)
$3.0 < \text{ØD1} \leq 6.0$	0 / +0.018
$6.0 < \text{ØD1} \leq 10.0$	0 / +0.022
$10.0 < \text{ØD1} \leq 18.0$	0 / +0.027
$18.0 < \text{ØD1} \leq 30.0$	0 / +0.033
$30.0 < \text{ØD1} \leq 50.0$	0 / +0.039
$50.0 < \text{ØD1} \leq 80.0$	0 / +0.046
$80.0 < \text{ØD1} \leq 120.0$	0 / +0.054
$120.0 < \text{ØD1} \leq 180.0$	0 / +0.063
$180.0 < \text{ØD1} \leq 250.0$	0 / +0.072
$250.0 < \text{ØD1} \leq 315.0$	0 / +0.081
$315.0 < \text{ØD1} \leq 400.0$	0 / +0.089
$400.0 < \text{ØD1} \leq 500.0$	0 / +0.097
$500.0 < \text{ØD1} \leq 630.0$	0 / +0.110

Groove width

Height H1 (mm)	Width	
	L2 min (mm)	L1 min (mm)
7.00	5.95	7.50
8.00	6.80	8.50
10.00	8.50	11.00
12.00	10.30	13.00
15.00	12.75	16.00
20.00	17.00	21.00

Groove radius

Height H1 (mm)	Radius R2 max (mm)
7.00	0.50
8.00	
10.00	
12.00	0.70
15.00	
20.00	